





SKIPPER are small asymmetrical fittings for indoor installations, suitable for max 300W lamps, available in two versions: SKIPPER and SKIPPER COMPACT.

SKIPPER version is also suitable for outdoor installations, only if installed in correct positions. The range is particularly recommended for lighting shop windows, architectural detail in buildings, advertising billboards, etc.

SKIPPER luminaria para interior, simétrica, para lámparas max 300W, disponible en dos versiones SKIPPER y SKIPPER COMPACT. SKIPPER versión utilizable también, solo si se instala correctamente se puede realizar en exterior, para escaparates, detalles arquitectónicos, letreros anuncios.

SKIPPER



SBP

design Ufficio Tecnico SBP







STRUCTURAL CONSTRUCTION

- Sandblasted body in die cast aluminium alloy painted in black or white.
- Safety toughened glass fixed to the body with two stainless steel springs.
- Reflector in very pure polished and anodized aluminium.
- Polyamide connection box which allows orientation of the fitting.

The fitting is available in two versions:

- SKIPPER - the flexible joint is complete with support for wall installation. It can be installed with A113/500-1000, A113/1000 support accessories.
- SKIPPER COMPACT - for wall installation and for indoor applications only.

Articulated joints complete with an anti-slide rack guarantee secure adjustment.

CARACTERISTICAS DE FABRICACION

- Cuerpo de aleación de aluminio inyectado, arenado pintado en negro o blanco.
- Vidrio de seguridad templado, sujeto al cuerpo por dos muelles de acero.
- Reflector de aluminio puro, pulido y anodizado.
- Caja de conexiones de poliamida que permite el ajuste de orientación.

Luminaria disponible en dos versiones.

- SKIPPER - la unión se suministra completa con soporte para instalar en pared. Puede usarse los accesorios A113/500-1000, A113/1000 soportes.
- SKIPPER COMPACT - para instalaciones en pared, solo interiores.


Uniones articuladas completas con arandela anti deslizamiento para ajuste seguro.

SBP

TECHNICAL AND UTILIZATION DATA DATOS TECNICOS Y DE MONTAJE

| | | | | | |
|--|--|--------------|---------------|--|--|
| | | IK 08 7 J | Max 0,8Kg | | |
|--|--|--------------|---------------|--|--|

| | | | | | |
|------------|--|-------|-------|--|-----------------|
| CLASS I | | 80 85 | IP 23 | | HDG Max 300W |
|------------|--|-------|-------|--|-----------------|

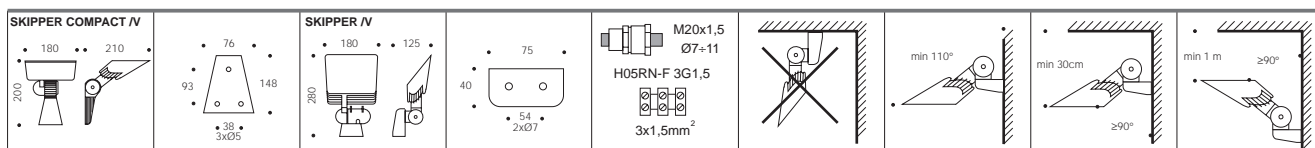




80 SKIPPER COMPACT / V



| | | | | | | |
|-----------|----------|-------------|----|---|-----|----------|
| 85 | 01036011 | COMPACT / V | 80 |  | R7s | max 300W |
| | 01037021 | COMPACT / V | 85 | | | |

Not suitable for use with accessories A113/500-1000, A117 and A0168.
 No para montar con los accesorios A113/500-1000, A117 y AD A0168.

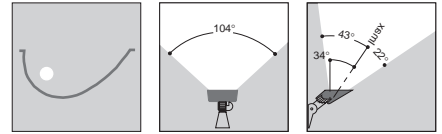


80 SKIPPER / V

| | | | | | | |
|-----------|----------|-----|----|---|-----|----------|
| 85 | 01032011 | / V | 80 |  | R7s | max 300W |
| | 01033021 | / V | 85 | | | |

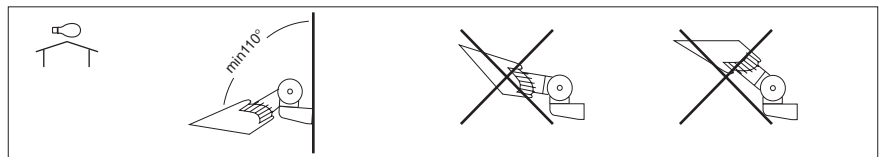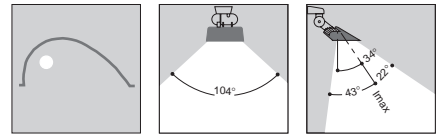


Compulsory positions for outdoor installation. For Skipper/V version only.
 Posición obligada para luminaria SKIPPER/V en instalaciones exterior.



14004011 - A113/500
 14005021 - A113/500
 14086011 - A113/1000
 14089021 - A113/1000

80 50/100cm sheet steel support painted
85 in black or in white.
80 Unsuitable for SKIPPER COMPACT.
85

Brazo soporte de 50/100cm. De acero pintado negro o blanco. Para SKIPPER COMPACT.



14002680 - A0168/500
 14002785 - A0168/500
 14002880 - A0168/1000
 14002985 - A0168/1000

80 Connection box (IP54) in injected
85 aluminium complete with 50/100cm
80 sheet steel arm painted in black or in
85 white, allows connection of fittings in series.
 Unsuitable for SKIPPER COMPACT.

Caja de conexiones (IP54) de aluminio inyectado completa con brazo 50/100cm. De acero pintado en negro o blanco, permite la instalación en serie. No disponible para SKIPPER COMPACT.

SKIPPER / V

