





ALBATROS are small asymmetrical floodlights for halogen and metal halide lamps, for outdoor and indoor installation.

They are suitable to light shop-windows, architectural details, small advertising panels, signs and so on.

ALBATROS son proyectores asimétricos pequeños, para instalaciones de lámparas halógenas o halogenuros metálicos, para exterior o interior.

Se recomiendan para escaparates, pequeños monumentos y detalles arquitectónicos, pequeños anuncios y letreros.

ALBATROS




SBP

design Arch. Silvia Paola Pennacchio





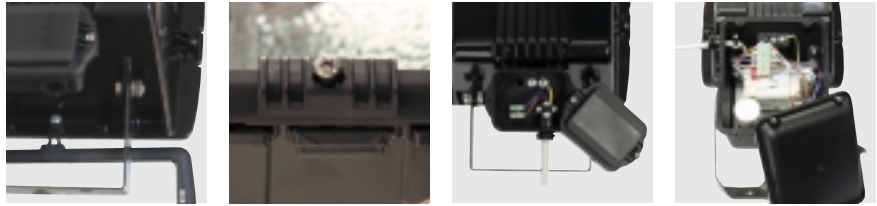

STRUCTURAL CONSTRUCTION

- Body in injected die cast aluminium alloy, sandblasted and painted in two colours: black or white.
- Technopolymer black colour frame, secured during maintenance operations.
- Reflector in very pure polished and anodised aluminium.
- Control gear housing in black technopolymer; electrical connection to be made inside the housing (for 70 and 150W metal halide models).
- Connection box in black technopolymer (only for 250-500W halogen version).
- Toughened safety glass.
- Bracket in black painted steel sheet.
- Stainless steel external screws.

CARACTERISTICAS DE FABRICACION

- *Cuerpo de aluminio inyectado arenado y pintado en dos colores: Negro, Blanco.*
- *Marco de tecnopolímero negro, sujeto para fácil mantenimiento.*
- *Reflector de aluminio puro anodizado y abrigantado.*
- *Caja de entrada de tecnopolímero negro; espacio para conexiones (para 70/150W halogeno metálico).*
- *Caja de equipos de tecnopolimeros negra (Solo para equipos de 250/500W halogenos metálicos).*
- *Vidrio templado y securizado.*
- *Tornillería exterior inoxidable.*

SBP

TECHNICAL AND UTILIZATION DATA DATOS TECNICOS Y DE MONTAJE

				IK 07 3 J				
CLASS I		80 85	IP 55		HGD 200+500W	SD 70+150W	MD 70+150W	
ALBATROS 25 • 150 • 255	ALBATROS 37/315 • 250 • 255			PG 11 Ø8,5+10,5 H05RN-F 3G1,5	ALBATROS 25 120° 30°	ALBATROS 37/315 max 120°		




80 85 ALBATROS 25

01050011 25/V 80
01051021 25/V 85



R7s

200-500W

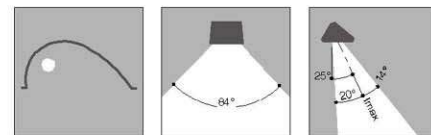

80 85 ALBATROS 37

05175013 37/07 V 80 CR ▽
05176023 37/08 V 85 CR ▽




RX7s 70W

HQI-TS/MH-TD
CDM-TD/NAV-TS



▽ Suitable for installation on normally flammable surfaces.
Capacidad de ser instalado en superficie inflamable.

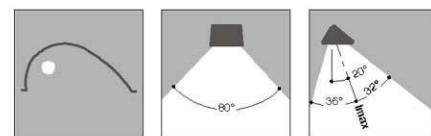

80 85 ALBATROS 315

05500013 315 V 80 CR ▽
05513023 315 V 85 CR ▽





RX7s 150W

HQI-TS/MH-TD
CDM-TD/NAV-TS




▽ Suitable for installation on normally flammable surfaces.
Capacidad de ser instalado en superficie inflamable.

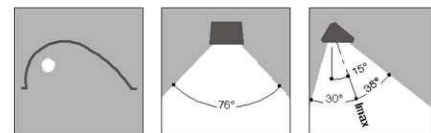




14095011 - A0022 **80**

Lighthood in black painted steel sheet. *Visera de acero pintada negro.*





14097011 - A0023 **80**

Antidazzle barrier in black painted steel sheet. *Reja anti deslumbrante de acero pintada negro.*




14235013 - A0026/500 **80**
 14236023 - A0026/500 **85**
 14237013 - A0026/1000 **80**
 14238023 - A0026/1000 **85**


50 or 100 cm. support in white or black painted steel sheet. *Soporte 50/100 cm de chapa de acero pintada en negro o blanco.*

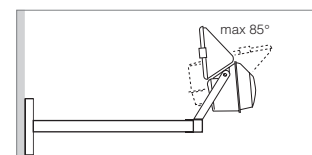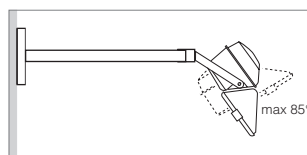

ALBATROS 25

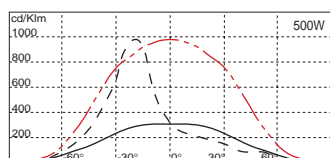

ALBATROS 315

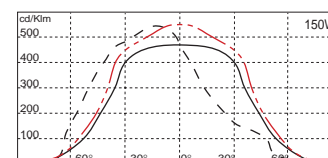

ALBATROS 37

